

5 DIGITAL LCD LOOP-POWERED METER (24x48mm)

DCLL

FEATURES

- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit
- Measuring DC 4~20mA
- High brightness LCD background display range: -19999~99999; decimal point selectable
- Meter depth 48.5 mm, easily installation
- CE approval






ORDER INFORMATION: DCLL - [Code 1]

Code 1	Input Type
DA6	4~20mA

SPECIFICATION

- ◆ Accuracy: 0.1% F.S. ± 1 digit
- ◆ Sampling Cycle: 2.5 cycles/sec
- ◆ Display Rang: -19999~99999
- ◆ Temp. Coefficient: 50ppm/°C (0~50°C)
- ◆ Display Screen: Red high efficiency LCDs high 10.16mm(0.4")
- ◆ Parameters Setting: Touch switches
- ◆ Back Up Memory: Non-volatile EEPROM memory
- ◆ Surge Test: 1.5KVac/1min. (input/power/display)
- ◆ Exciting Power: 12VDC $\pm 3\%$ (<50mA)
- ◆ Operating Temp.: 0~50°C (20 to 90% RH non-condensed)
- ◆ Storage Temperature: 0~70°C (20 to 90% RH non-condensed)

DIMENSION

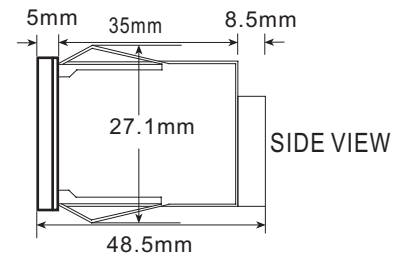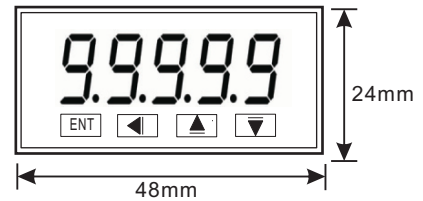

WIRING CONNECTION

