

5 DIGITAL DUEL INPUT MICRO-PROCESS MATH METER with 1~4 ALARMS / RS-485

DC5H-B

FEATURES

- Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC); $\pm 0.2\%$ F.S. ± 1 digit (AC)
- Measuring AC, DC Voltage / AC, DC Current for mathematics (+, -, x, /)
- High brightness 0.8" LED display range: -19999~99999; decimal point selectable
- Max. Hold / Data Hold / Reset / 2~4 Alarms (Hi or Lo) programmable / RS-485 communication optional (The above options can exist together)
- High stability, non-flammable case (PC), high safety
- CE approval



ORDER INFORMATION: DC5H-B - [Code 1] - [Code 2] [Code 3] - [Code 4] [Code 5] [Code 6]


Code 1	Input Type	Code 2	I/P 1	Code 3	I/P 2	Code 4	Aux. Power	Code 5	Alarm Output	Code 6	RS-485
D	DC	1	0~50mV	1	0~50mV	A	AC/DC 100~240V	N	None	N	None
A	AC AVG	2	0~10V	2	0~10V	B	DC 12V	R2	2 Relays	Y	Yes
M	AC TRMS	3	0~300V	3	0~300V	C	DC 22~60V	R3	3 Relays		
		4	0~20mA	4	0~20mA	D	DC 30~90V	R4	4 Relays		
		5	4~20mA	5	4~20mA			O2	2 Open Collect		
		6	0~2A	6	0~2A			O3	3 Open Collect		
		7	0~5A	7	0~5A			O4	4 Open Collect		
		O	Option	O	Option						

**1:3 Relay type only offers A(NormalOpen) output. O.C. (Open Collect) offers NPN of C.E. output.


SPECIFICATION

- ◆ Accuracy: $\pm 0.1\%$ F.S. ± 1 digit (DC)
- ◆ Display Screen: High brightness red LED; 20.4mm(0.8")
- ◆ Sampling Cycle: 16 cycles / sec (AVG=1)
- ◆ Display Range: -19999~99999
- ◆ Zero Adjustment: -19999~99999
- ◆ Over Range Indication: doFL / ioFL or -doFL / -ioFL
- ◆ Polarity Indication: Automatic with "-" indication
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Alarm Action: " $\geq$ (Hi) on" or "< (Lo) on"
- ◆ Alarm Run Delay Time: 0~99 sec
- ◆ Alarm Hysteresis Range: 0~9999
- ◆ Relay Contact: AC 277V / 7A; DC 30V / 7A
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 38400 / 19200 / 9600 / 4800 bps
- ◆ Parity Check: n.8.2. / n.8.1. / odd / even
- ◆ Temperature Coefficient: 100ppm / $^{\circ}\text{C}$ (0~60 $^{\circ}\text{C}$)
- ◆ Operating Temperature: 0~60 $^{\circ}\text{C}$
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70 $^{\circ}\text{C}$
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 22~60V
- ◆ Power Consumption: 8.5VA (all functions output)
- ◆ Surge Test: 2KVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage: $\geq 2\text{V}$ for 20K Ω / V; $\leq 2\text{V}$ for >200M Ω
Current: $\geq 0.2\text{A}$ at 100mV; $\leq 0.2\text{A}$ at 1V
- ◆ Dimensions: 96(W)*48(H)*110(D) mm
- ◆ Weight: About 500 g

FRONT PANEL & KEY FUNCTIONS

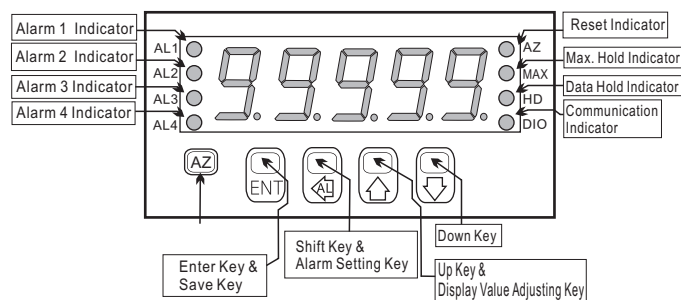

DIMENSION

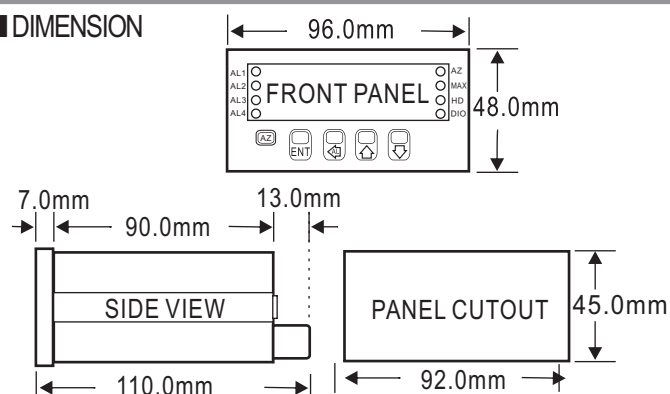

WIRING CONNECTION

