

5 DIGITAL MICRO-PROCESS RS-485 METER (24x48mm)

DC5X-S

FEATURES

- Programmable display by RS-485 communication
- High brightness 0.4" LED display range: -19999~99999; decimal point selectable
- Meter depth 85 mm, easily installation
- High stability, non-flammable case (PC), high safety
- CE approval






ORDER INFORMATION: DC5X - S - Code 1

Code 1	Aux. Power
A	AC/DC 100~240V
C	DC 22~60V

SPECIFICATION

- ◆ Display Screen: High brightness red LED; 10.14mm(0.4")
- ◆ Display Range: -19999~99999
- ◆ Parameters Setting: Push buttons
- ◆ Back Up Memory: EEPROM
- ◆ Communication: RS-485 Modbus RTU mode
- ◆ Baud Rate: 19200 / 9600 / 4800 / 2400 bps
- ◆ Parity Check: n.8.2. / n.8.1. / odd / even
- ◆ Temperature Coefficient: 100ppm / °C (0~60°C)
- ◆ Operating Temperature: 0~60°C
- ◆ Operating Humidity: 20~90% RH (non-condensing)
- ◆ Storage Temperature: -10~70°C
- ◆ Storage Humidity: 20~90% RH (non-condensing)
- ◆ Power Supply: AC/DC 100~240V; DC 22~60V
- ◆ Power Consumption: 8.5VA (all functions output)
- ◆ Surge Test: 1.5KVac / 1min (Input / Power)
- ◆ Input Impedence: Voltage: >2V for 20KΩ / V; ≤2V for >200MΩ
Current: ≥0.2A at 100mV; <0.2A at 1V
- ◆ Dimensions: 48(W)*24(H)*85(D) mm
- ◆ Weight: About 150 g

DIMENSION

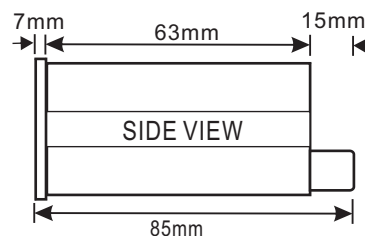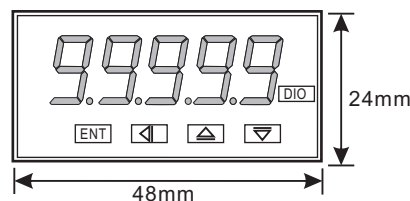

WIRING CONNECTION

